


310 | Cast-in-Place Trapeze

Temporary pre-pour securement | No load rating published

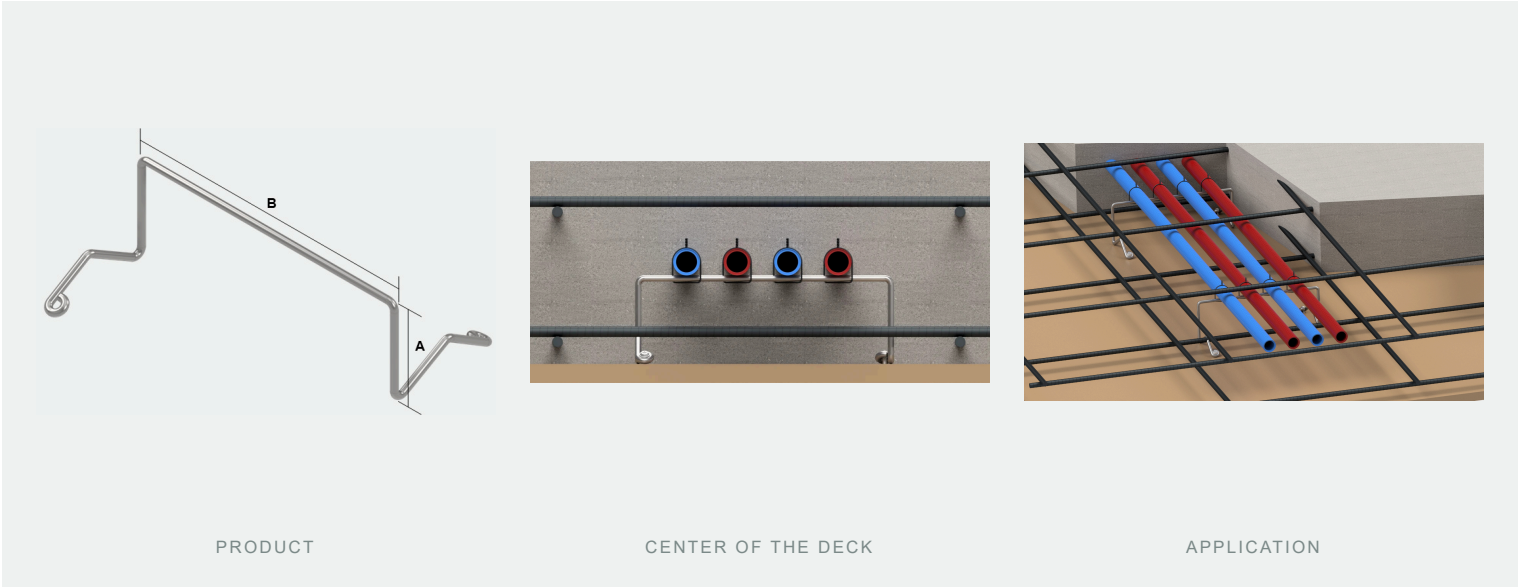

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	per order	Height, in.; minimum per the deck thickness table
B	per order	Width, in.

Ready to ship: 310A03B08 / B12. Other sizes are custom made per order.

Deck thickness	Min trapeze height
6 in.	2.00 in.
7 in.	2.50 in.
8 in.	3.00 in.
9 in.	3.00 in.
10 in.	3.50 in.
11 in.	4.00 in.
12 in.	4.00 in.

03 NOTES

Cast-in-place trapeze: locks pipe and conduit into the center third of the deck; size the height from the deck thickness table.

- Angled feet conceal the support when the forms are removed.
 - Galvanized rod; corrosion resistant.
 - Rigid support: stable pipe and conduit positioning during the pour.
 - Designed for demanding high-rise construction.
- Maintains structural positioning within the center third of the deck.
 - Electrical and plumbing: positions PVC conduit, PVC-coated GRC, ENT and PVC-jacketed MC (NEC 352.30, 344.30, 362.30, 330.30) and sleeved PEX (IPC 305, UPC 312.2) in the pour, secured so they cannot float, shift or separate at joints; spacing per the specifications and the manufacturer.
 - Drawings not to scale.