


320 | Cast-in-Place Street 90 Support

Temporary pre-pour securement | No load rating published

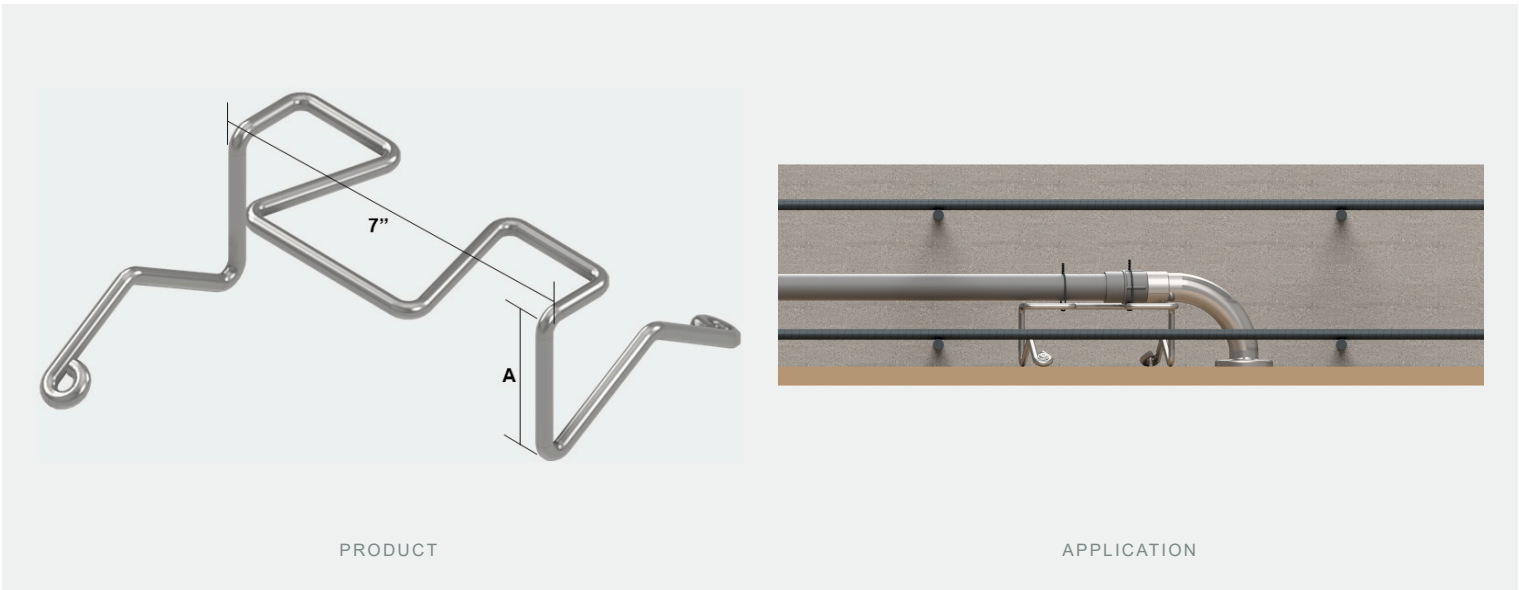

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	per order	Size: A01 2.5 in. for 1/2 and 3/4 in. 90s (Red Dot ESL, Orbit MCSI); A02 2.25 in. for 1 in.; AXX other

Custom made per order.

03 NOTES

Secures a street 90 stub-up during the pour; fixed 7 in. height.

- Angled feet conceal the support when the forms are removed.
 - Galvanized rod; corrosion resistant.
 - Rigid support: stable pipe and conduit positioning during the pour.
 - Designed for demanding high-rise construction.
- Other 90 brands accommodated on request.
 - Electrical: positions PVC conduit, PVC-coated GRC and ENT raceways, boxes and fittings in the pour (NEC 352.30, 344.30, 362.30), secured so they cannot float or shift; spacing per the specifications and the manufacturer.
 - Drawings not to scale.