


115P | Simple Lasso

Plumbing: PEX piping | 5/8 - 3 in. | Listed: ICC-ES PMG-1840

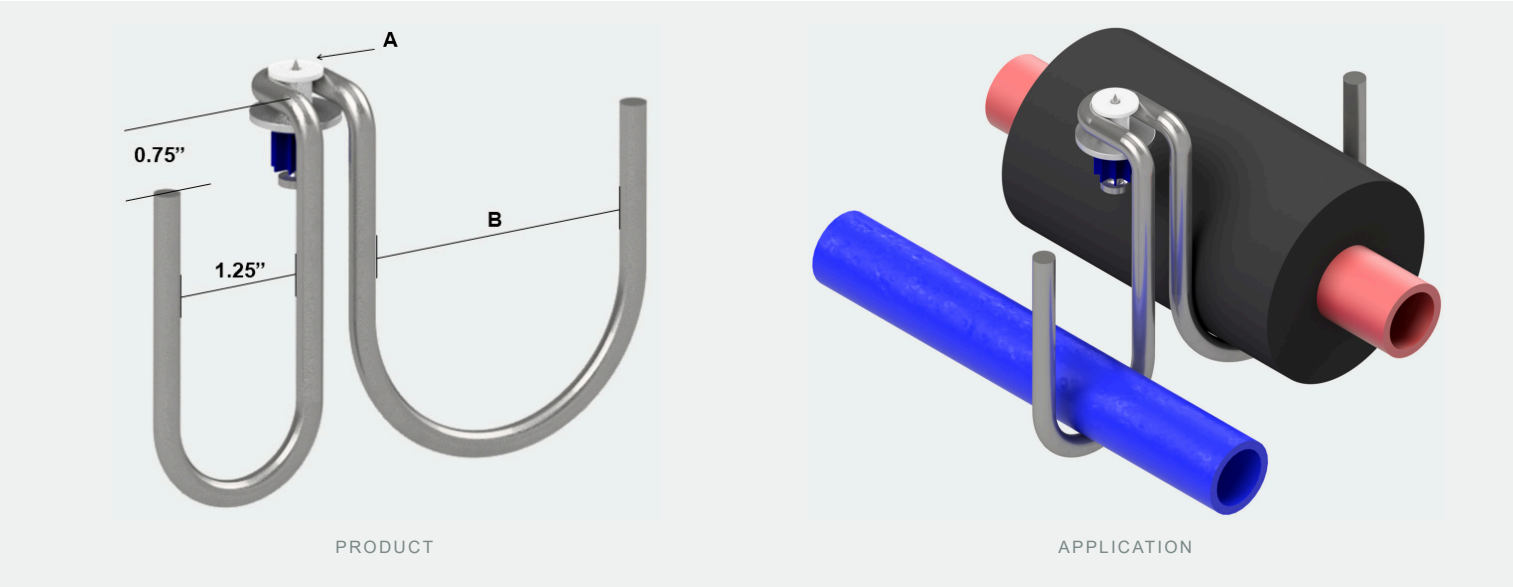

01 CAPACITY

Rated load 50 lbs, listed per ICC-ES PMG-1840 Table 1 (September 2026). The published capacity of the configured assembly is **50 lbs** with every fastener option in its listed substrate: each option meets or exceeds the support rating, so the support governs.

The rated load applies to the support assembly; the attachment to structure is evaluated separately. The fastener backup documents (F sheets) are furnished upon request, and a configured assembly sheet is issued per project with the selected fastener and its substrate capacities.

02 ORDERING

Segment	Selection	Description
A	Fastener, by substrate	Power actuated pins and post nuts: A001 PD157-100W, A01 PD157-114W, A02 PD157-112W, A03 PD157-100NR, A04 PD157-114NR, A05 PD157-112NR. Concrete anchors: A20 7404SD1-PWR, A21 7413SD2-PWR, A30 PFM1411060. Wood fasteners: A40 TB250, A50 HL14200. Sheet steel: A60 HWD10114. Steel clips (sidemount only): A71 BC50, A72 PC25, A73 HBC25, A74 HBC50.
B	Size	B01 1/2 in. PEX, 1/2 in. insul. (1.625 ID). B02 1/2 in. PEX, 3/4 in. insul. (2.125 ID). B03 1/2 in. PEX, 1 in. insul. (2.625 ID). B04 3/4 in. PEX, 1/2 in. insul. (1.875 ID). B05 3/4 in. PEX, 3/4 in. insul. (2.375 ID). B06 3/4 in. PEX, 1 in. insul. (2.875 ID). B07 1 in. PEX, 1/2 in. insul. (2.125 ID). B08 1 in. PEX, 3/4 in. insul. (2.625 ID). B09 1 in. PEX, 1 in. insul. (3.125 ID).

Ready to ship: 115A001B05.

03 NOTES

Secures insulated PEX hot and cold lines with one shot; the lasso ID matches the PEX size and insulation thickness selected.

- Secures both cold and hot insulated PEX piping.
- Designed for demanding high-rise construction.
- Rigid connection to structure; listed for the support of plumbing and mechanical piping under the IPC, UPC, IMC and UMC and their California editions (ICC-ES PMG-1840).
- Finish: zinc plated.
- Support spacing per the applicable plumbing or mechanical code (IPC 308.5, UPC 313.3).
- Dry locations only, per the listing.
- Rated load carries a minimum 4:1 factor of safety on ultimate tested capacity per ICC-ES LC1041 and UL 2239.
- The rated load applies to the support assembly only; the attachment to structure is evaluated separately (Section 01).
- Seismic: per ASCE 7, power actuated fasteners are limited to 90 lbs of tension in Seismic Design Categories C ($I_p = 1.5$), D, E and F. The capacity published here is already at or below that limit, so it is unchanged on a seismic project.
- Drawings not to scale.