


322 | Table Top Box Support

Temporary pre-pour securement | No load rating published

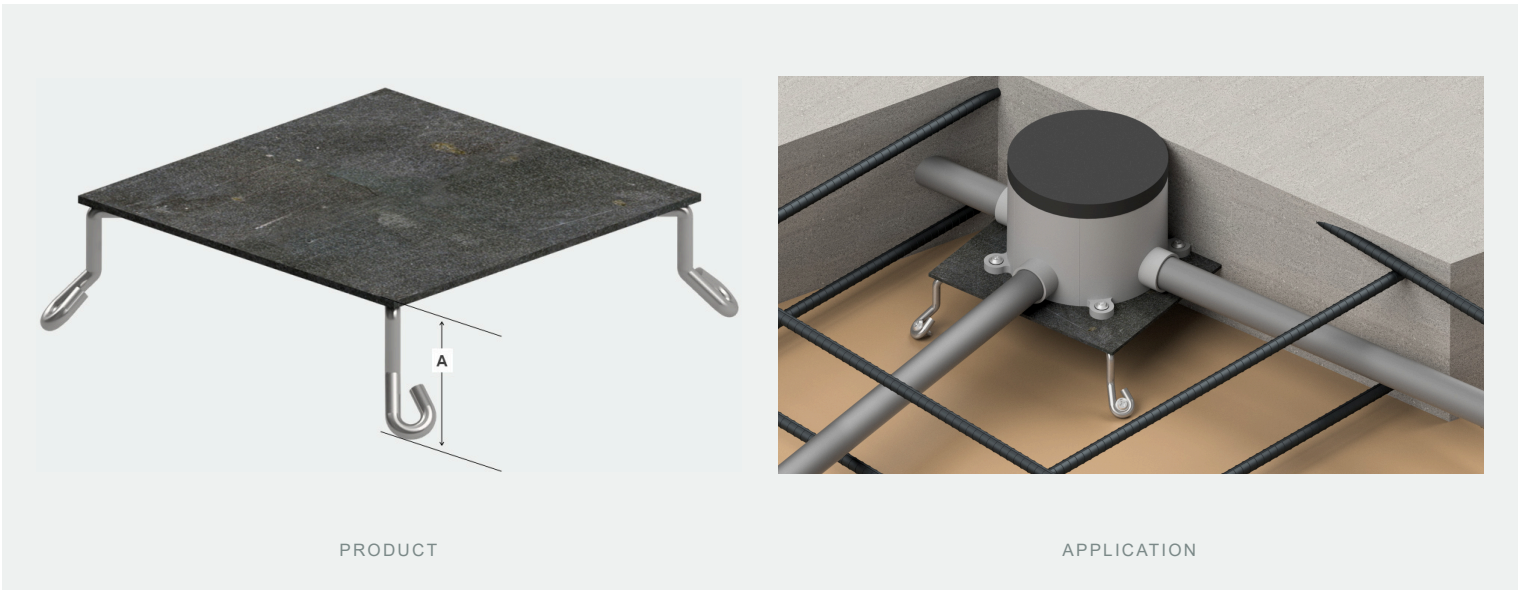

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	per order	Height, in.

Custom made per order.

03 NOTES

Positions a floor box during the pour; the table top withstands deck traffic.

- Angled feet conceal the support when the forms are removed.
- Galvanized rod; corrosion resistant.
- Rigid support: stable pipe and conduit positioning during the pour.
- Designed for demanding high-rise construction.
- Table top is a 7 x 7 x 1/8 in. steel plate standard; other sizes per order.
- Electrical: positions PVC conduit, PVC-coated GRC and ENT raceways, boxes and fittings in the pour (NEC 352.30, 344.30, 362.30), secured so they cannot float or shift; spacing per the specifications and the manufacturer.
- Drawings not to scale.