


323 | Wall Box Hook

Temporary pre-pour securement | No load rating published

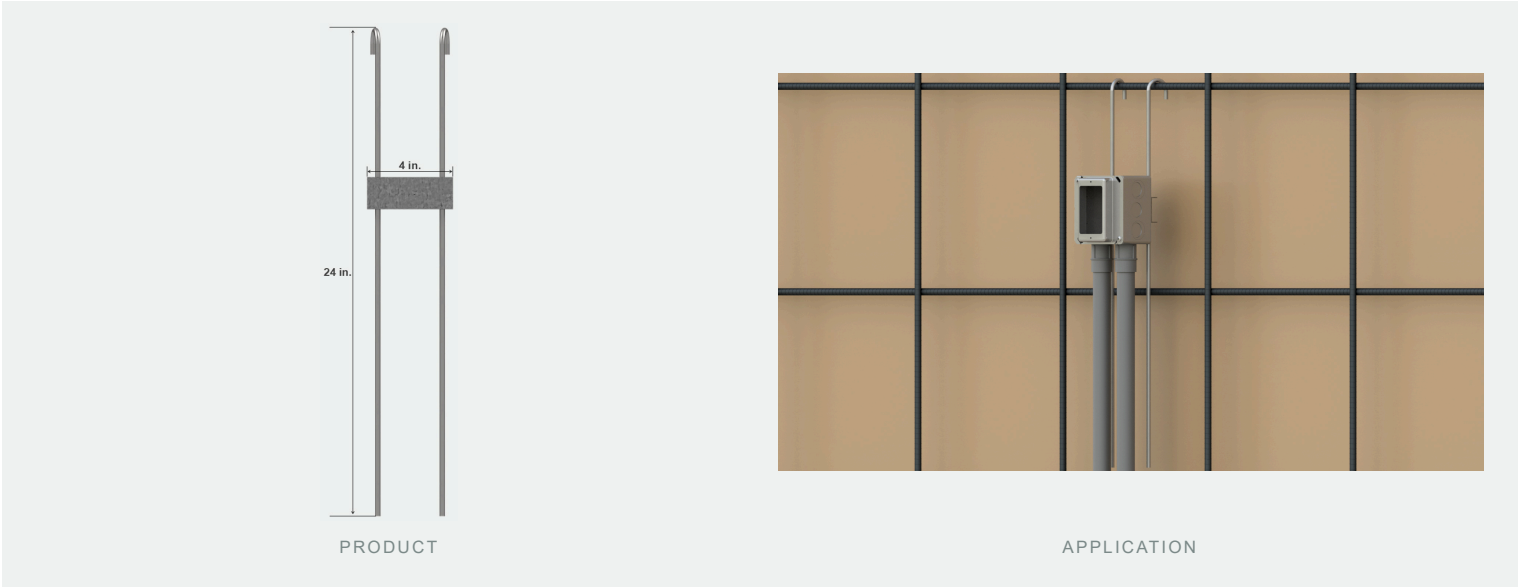

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.


02 ORDERING

One size; specify quantity.
Custom made per order.

03 INSTALLATION



Step 1. Screw the box to the plate. Hook the assembly over the rebar and set the elevation of the box.

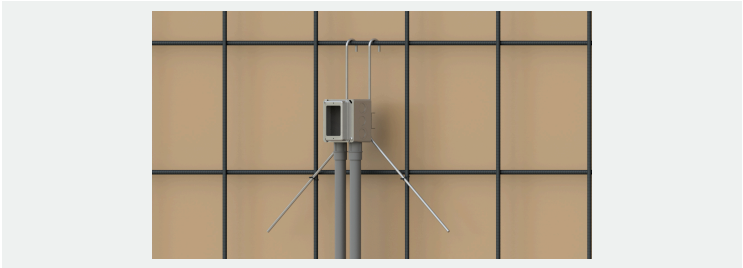

Step 2. Bend the legs to fix the elevation and use the wire to secure in place.

04 NOTES

Secures wall boxes in place without penetrating the forms; the mud ring compresses against the form for a tight seal.

- Galvanized rod; corrosion resistant.
- Designed for demanding high-rise construction.
- Electrical: positions PVC conduit, PVC-coated GRC and ENT raceways, boxes and fittings in the pour (NEC 352.30, 344.30, 362.30), secured so they cannot float or shift; spacing per the specifications and the manufacturer.
- Drawings not to scale.