


370 | Simple HD Metal Deck Sleeve

Temporary pre-pour securement | No load rating published

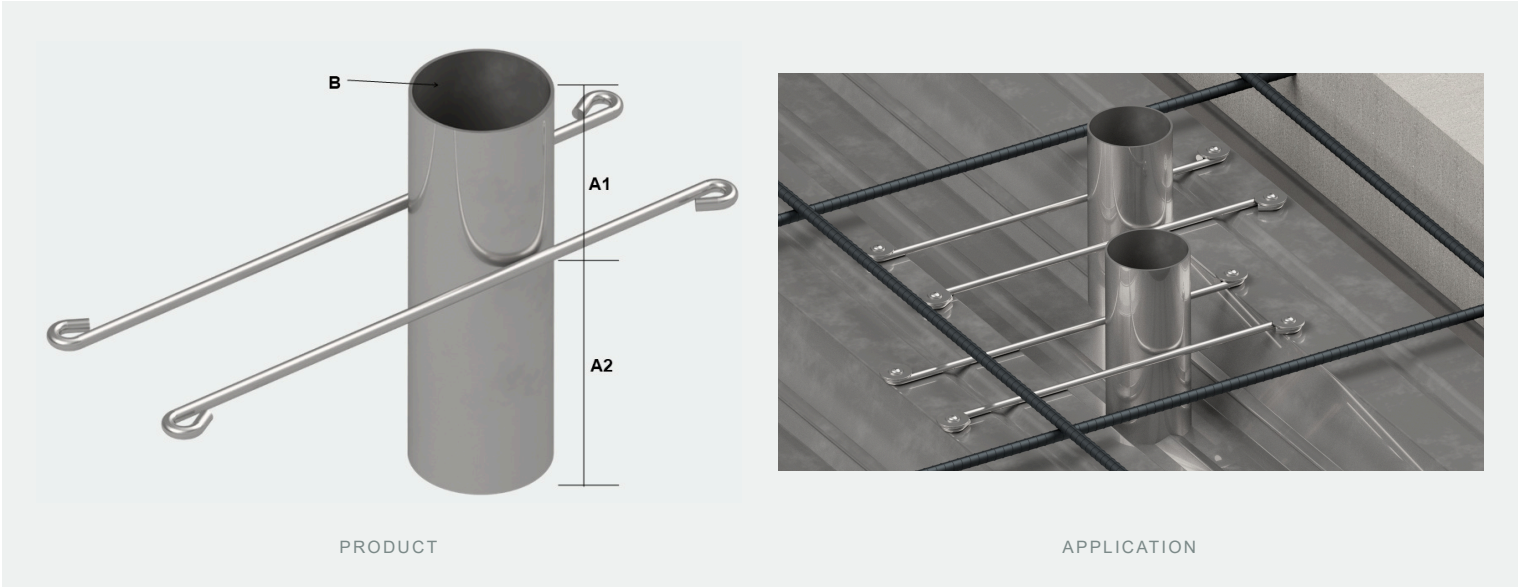

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A1	per order	Height above deck, in.
A2	per order	Height below deck, in.
B	per order	Nominal hole ID: 1 / 1.5 / 2 / 2.5 / 3 / 4 / 6 / 8 / 10 in. (XX other)

Custom made per order.

03 NOTES

Heavy duty deck sleeves keep penetrations clear of concrete; the offset supports position the sleeve anywhere on the deck profile.

- Work safe: the installer secures pipes in place prior to rebar.
- Galvanized rod; corrosion resistant.
- Designed for demanding high-rise construction.
- Actual hole ID varies slightly with the material wall thickness.
- Electrical and plumbing: positions PVC conduit, PVC-coated GRC, ENT and PVC-jacketed MC (NEC 352.30, 344.30, 362.30, 330.30) and sleeved PEX (IPC 305, UPC 312.2) in the pour, secured so they cannot float, shift or separate at joints; spacing per the specifications and the manufacturer.
- Drawings not to scale.