


406 | Slab-on-Grade Dbl Loop Slick Rod

Temporary pre-pour securement | No load rating published

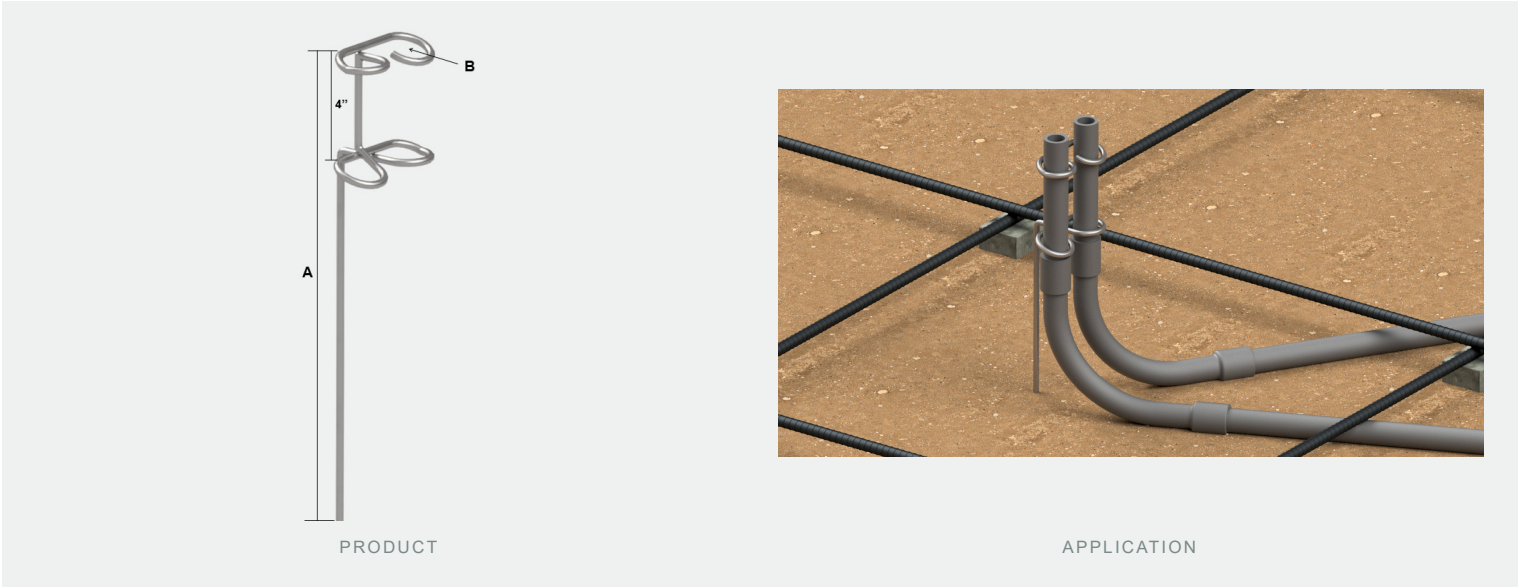

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	per order	Height: 12, 18 or 24 in. (XX other)
B	per order	Hole ID: 1.25 / 1.50 / 1.75 / 2.00 / 2.25 / 2.50 in. (XX other); order a larger hole ID to pass couplings

Custom made per order.

03 NOTES

Slab-on-grade slick rod support with two integrated loops: secures two pipes prior to rebar.

- Work safe: the installer secures pipes in place prior to rebar.
- Galvanized rod; corrosion resistant.
- Designed for demanding high-rise construction.
- Integrated loop secures the pipe without extra ties, speeding up installation.
- Electrical and plumbing: positions PVC conduit, PVC-coated GRC, ENT and PVC-jacketed MC (NEC 352.30, 344.30, 362.30, 330.30) and sleeved PEX (IPC 305, UPC 312.2) in the pour, secured so they cannot float, shift or separate at joints; spacing per the specifications and the manufacturer.
- Drawings not to scale.