


420 | Simple Candy Cane

Temporary pre-pour securement | No load rating published

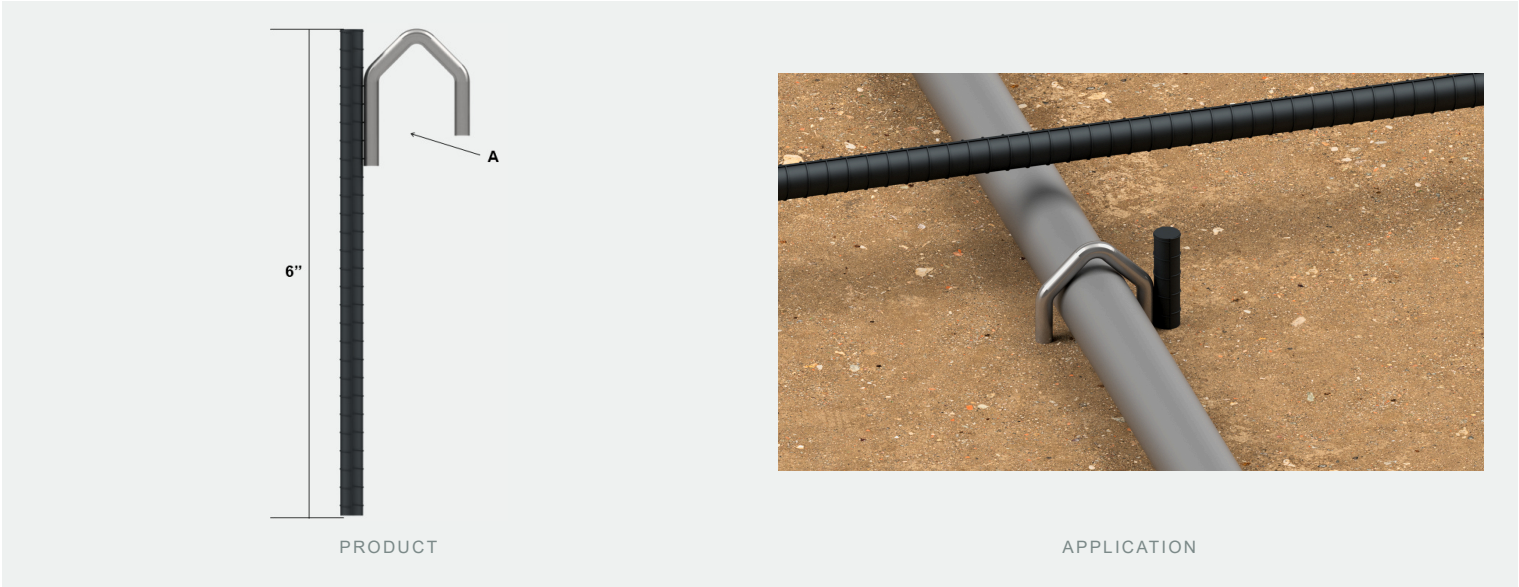

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	A15	1.5 in. ID loop; 6 in. long standard
A	A20	2 in. ID loop; 6 in. long standard

03 NOTES

Slab-on-grade candy cane: hooks over the pipe to secure it in place through the pour; 6 in. long standard.

- ID and length dimensions can be changed per order.
- Work safe: the installer secures pipes in place prior to rebar.
- Galvanized rod; corrosion resistant.
- Designed for demanding high-rise construction.
- Electrical and plumbing: positions PVC conduit, PVC-coated GRC, ENT and PVC-jacketed MC (NEC 352.30, 344.30, 362.30, 330.30) and sleeved PEX (IPC 305, UPC 312.2) in the pour, secured so they cannot float, shift or separate at joints; spacing per the specifications and the manufacturer.
- Drawings not to scale.