


430 | Cast-in-Place Panel Cage

Temporary pre-pour securement | No load rating published

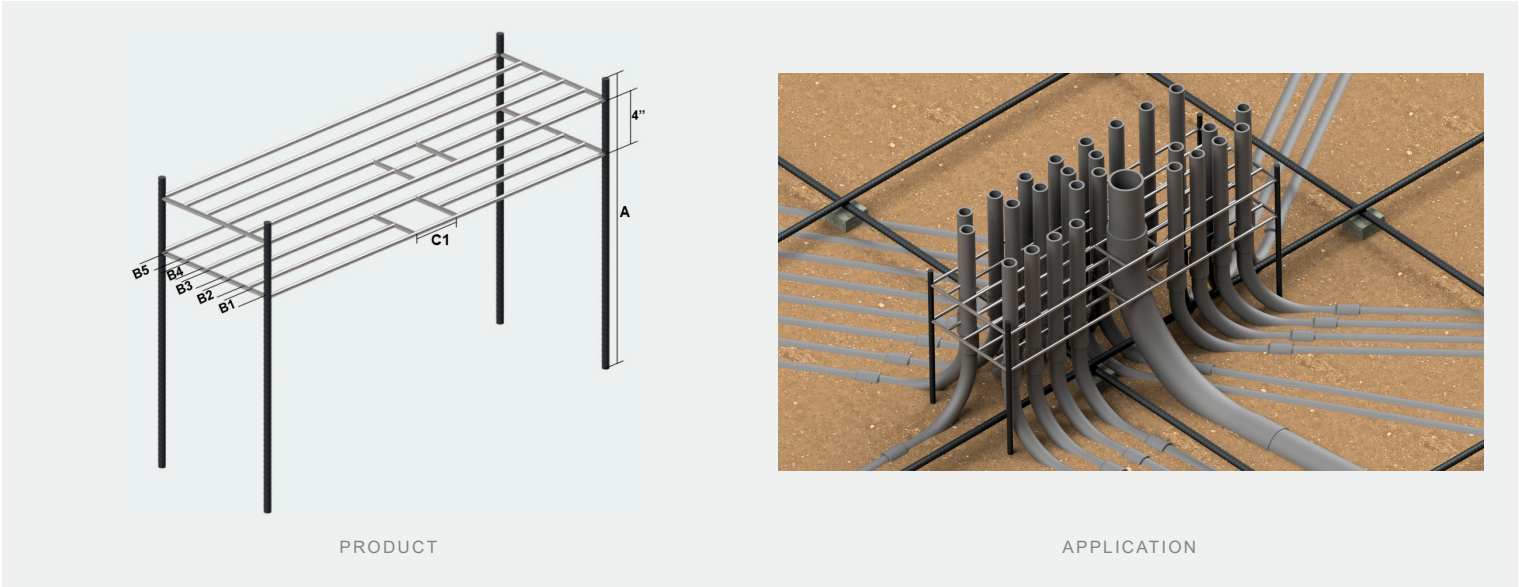

01 FUNCTION

Temporary securement device: positions and secures the utility before and during the concrete pour. No load rating is published; the cured concrete carries the utility.

02 ORDERING

Segment	Selection	Description
A	per order	Height: 18 or 24 in. (XX other)
B1 - B5	per order	Channel ID, each of the five channels: 1.25 / 1.50 / 1.75 / 2.00 / 2.25 / 2.50 in. (XX other)
C	per order	Length, in.
C1	per order	Window, in.

03 NOTES

Panel cage for grouped runs: five channels carry pipe and conduit through the pour; customized to the project.

- Work safe: the installer secures pipes in place prior to rebar.
- Galvanized rod; corrosion resistant.
- Designed for demanding high-rise construction.
- The panel cage can be customized to the project; ask for what you need.
- Electrical and plumbing: positions PVC conduit, PVC-coated GRC, ENT and PVC-jacketed MC (NEC 352.30, 344.30, 362.30, 330.30) and sleeved PEX (IPC 305, UPC 312.2) in the pour, secured so they cannot float, shift or separate at joints; spacing per the specifications and the manufacturer.
- Drawings not to scale.